



Overview

RK25 Pistol, a pistol-shaped handle with a trigger button, is used for working with RK25 Mobile Computer to perform intensive scanning.

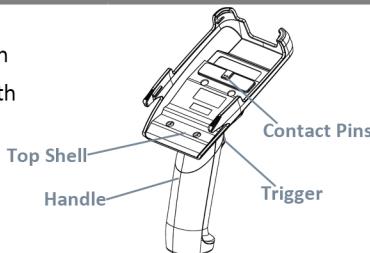

Scanning




1. Launch the application "ReaderConfig".
2. Aim the scan window at the barcode to read.
3. Pull the trigger on the pistol grip.

Installation

Step 1:

Loosen the 2 screws in the back side of RK25 Mobile Computer to remove the Wrist Band Hole which covers the contact pins. If a hand strap is attached, removed it from RK25 Mobile Computer as well.




Step 2:

With the back side of RK 25 mobile computer downwards, insert its top side into the pistol top shell first, and then press down the bottom side of RK 25 mobile computer to fasten it till you hear a "click" sound.

Remove

Step 1:

As the figure shows, place the RK25 mobile computer installed with a pistol on a horizontal flat surface by both your hands holding the two side of the pistol top shell.




Step 2:

Keeping holding the pistol top shell with both hands, and slightly pull aside the two sides of pistol top shell by thumbs.



Step 3:

While the two side of the pistol top shell is pulled aside by your thumbs, use other fingers to push out the RK25 mobile computer from its back side to make it apart with the pistol.



RK25 行動電腦槍式握把 快速開始指南

>

繁中 簡中

RK25行动电脑枪式握把 快速开始指南

>>

繁中 簡中

概覽／概览

RK25行動電腦槍式握把，搭配RK25行動電腦使用，便於進行大量資料蒐集。

RK25行动电脑枪式握把，搭配RK25行动电脑使用，便于进行大量数据搜集。


安裝／安装

步驟 1：

RK25行動電腦主機背面有一手腕帶孔覆蓋於金屬接點上，鬆開其上2顆螺絲以移除手腕帶孔。若主機上安裝有手腕帶，也請一併移除。

步驟 1：

RK25行动电脑主机背面有一手腕带孔覆盖于金属接点上，松开其上2颗螺丝以移除手腕带孔。若主机上安装有手腕带，也请一并移除。

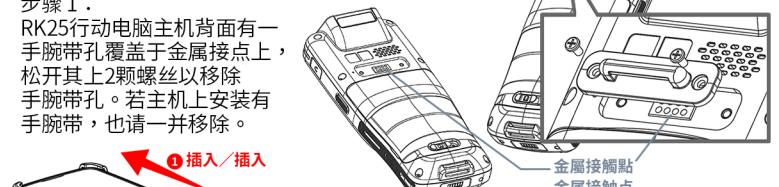


步驟 2：

請將RK25行動電腦主機背面朝下，先將主機頂端插入槍式握把的頂部外殼內，接著下壓主機底端使其與頂部外殼內密合至『喀』聲響。

步骤 2：

请将RK25行动电脑主机背面朝下，先将主机顶端插入枪式握把的顶部外壳内，接着下压主机底端使其与顶部外壳内密合至『喀』声响。

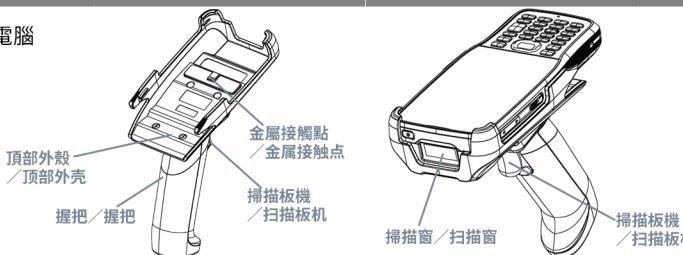


卸除／卸除

步驟 1：

如圖所示，將安裝有槍式握把的RK25行動電腦，以雙手緊握槍式握把頂部外殼兩側，放置於平面上。

步骤 1：

如图所示，将安装有枪式握把的RK25行动电脑，以双手紧握枪式握把顶部外壳两侧，放置于平面上。




步驟 2：

持續以雙手握緊槍式握把頂部外殼，並以拇指將頂部外殼兩臂向外輕推開。

步骤 2：

持续以双手握紧枪式握把顶部外壳，并以拇指将顶部外壳两臂向外轻推开。



步驟 3：

在頂部外殼兩臂以拇指推開的同時，餘指輔助朝內推動RK25主機使其彈出握把頂部外殼。

步骤 3：

在顶部外壳两臂以拇指推开的同时，余指辅助朝内推动RK25主机使其弹出握把顶部外壳。