

RK25 多槽充電器

快速使用指南

繁中 簡中

RK25 多槽充电器

快速使用指南

繁中 簡中

檢視包裝內容物/检视包装内容物

☑RK25 多槽充電器/RK25 多槽充电器

☑電源轉換器(附電源線)/电源适配器(附电源线)


☑電源線一分為五擴充線/电源线一分为五扩充线

☑快速使用指南/快速使用指南

RK25 多槽充電器可同時為二十顆 RK25 電池進行充電。

/RK25 多槽充电器可同时为二十颗 RK25 电池进行充电。

概覽/概览

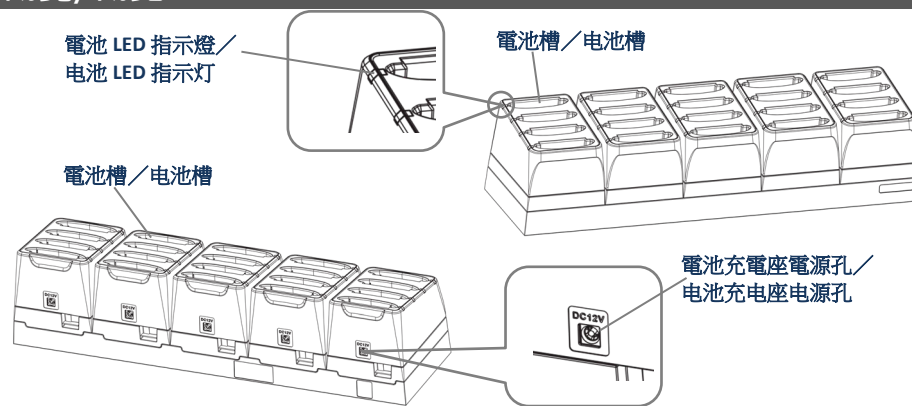

重要電源資訊/重要电源资讯

電源轉換器 电源适配器	輸入/输入: AC 100-240V, 47-63Hz 輸出/输出: DC 12V±5%, 9A CipherLab 專用電源供應器/ CipherLab 专用电源供应器
電池容量 电池容量	3.8V, 4000mAh CipherLab 專用充電式鋰聚合物電池/ CipherLab 专用充电式锂聚合物电池
充電時間/充电时间	約 8 小時
充電溫度/充电温度	0°C~40°C

LED 指示燈/LED 指示灯

多槽充電器上的充電指示燈顯示電池充電資訊。/多槽充电器上的充电指示灯显示电池充电资讯。

LED 指示燈狀態說明/LED 指示灯状态说明

綠燈恆亮/绿灯恒亮	充電完成/充电完成
紅燈恆亮/红灯恒亮	電池充電中/电池充电中
紅燈閃爍/红灯闪烁	充電錯誤 (如: 超出可充電的溫度範圍) / 充电错误 (如: 超出可充电的温度范围)


充電/充电

步驟 1: 將『電源線一分為五擴充線』接上電源轉換器。再將電源線一端連接到電源轉換器, 另一端連接到插座。

步驟 1: 将『电源线一分为五扩充线』接上电源适配器。再将电源线一端连接到电源适配器, 另一端连接到插座。

連接電源轉換器

/连接电源适配器

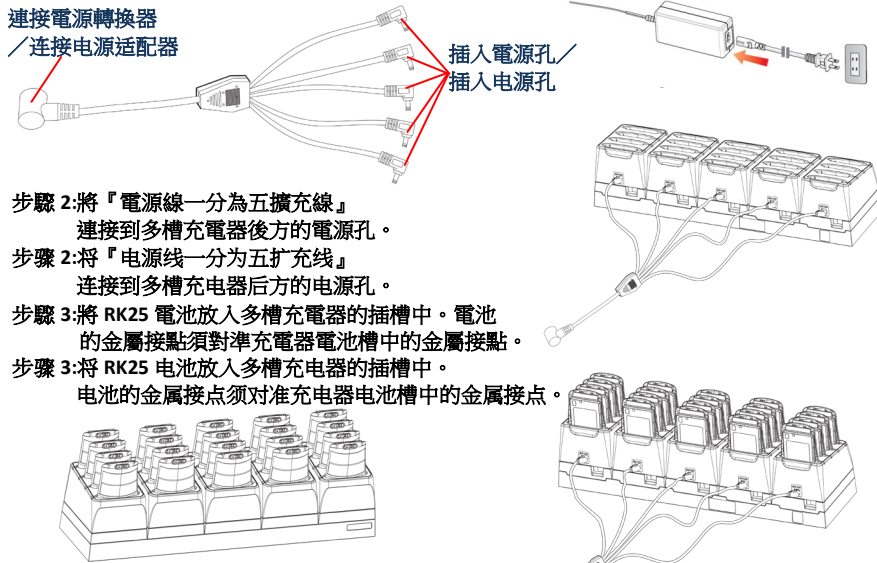

RK25 Multiple Slot Charger

Quick Start Guide

>

EN

>>


EN

Open Your Box

- ✓ Multiple Slot Cradle
- ✓ Multiple Charging Cable
- ✓ Adapter plus Power Cord
- ✓ Quick Start Guide

RK25 Multiple Slot Cradle allows simultaneous charging up to twenty RK25 batteries

Overview

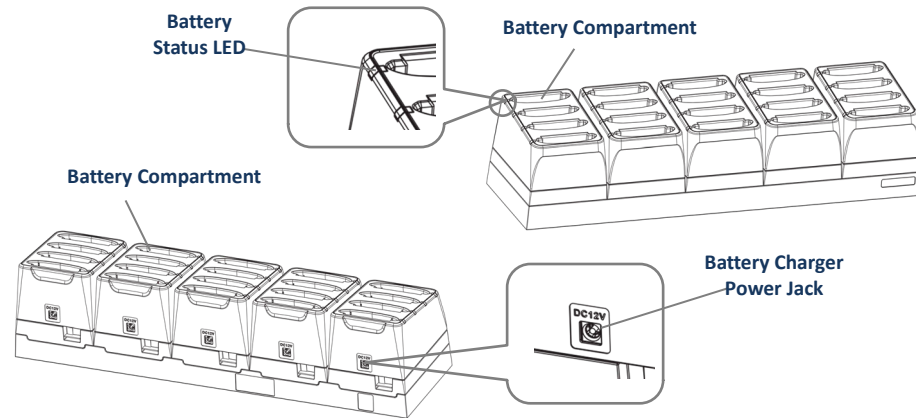

Important Charging Information

Power Supply	Input: AC 100-240V, 47-63Hz; Output: DC 12V±5%, 9A CipherLab approved
Battery Pack	3.8V, 4000mAh rechargeable Li-ion battery CipherLab proprietary
Charging Time	Approx. 8 hours
Charging Temperature	0°C~40°C

Cipherlab Europe representative office.
Cahorslaan 24, 5627 BX Eindhoven, The Netherlands
Tel: +31 (0) 40 2990202

LED Indicators

The battery status LED on the charger shows the battery charging status:

Charging LED Status


Green, solid	Charging complete
Red, solid	Charging the battery
Red, blinking	Charging error (e.g. the charging temperature is out of the valid range)

Charging

Step 1:

Connect the Multiple Charging Cable with the adapter, and then connect the power cord with the adapter. Finally, plug the power cord to an electrical outlet.

Connect with the adapter

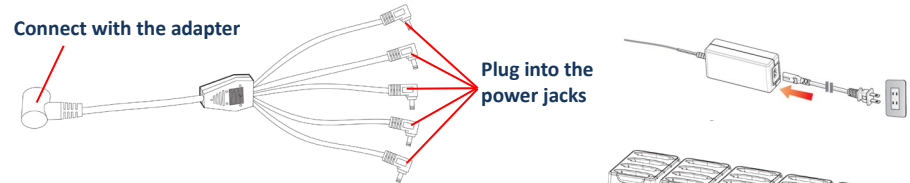

Step 2:

Plug the Multiple Charging Cable into the battery charger power jack on the back of the Multiple Slot Charger.

Step 3:

Insert the battery into the charging compartment with the battery contact pins connected to the contact pins inside the battery compartment.

